

# 200A, 25 kV Class Loadbreak Bushing Insert



25-LBI200

### **APPLICATION**

The Chardon Bushing Insert threads onto a standard 200A bushing well. The combination of the bushing well and bushing insert perform the same function as a one piece integral loadbreak bushing, while providing the flexibility to change the bushing insert in the field, without taking the transformer or other apparatus out of service. The bushing insert and loadbreak elbows are the primary components in all ANSI/IEEE loadbreak connections.

The Chardon Bushing Insert incorporates an all copper current path. This provides reliable and consistent performance under all conditions.

The Chardon Bushing Insert meets all the requirements of IEEE Standard 386, and is fully interchangeable with competitor's products and mating products that also meet IEEE Standard 386. When installed with mating components, the bushing insert provides a fully shielded and fully submersible connection for loadbreak applications.

No special tools are required for installation. The bushing insert can be installed by hand or with the assistance of a torque tool. An internal hex broach allows for the installation by the torque tool.

### **PRODUCTION TESTS**

#### Tests conducted in accordance with IEEE/ANSI Standard 386.

- Minimum Corona Voltage Level 19 kV
- AC 1 Minute Withstand 40 kV

#### Tests conducted in accordance with Chardon manufacturing process requirements:

- Physical Inspection
- Periodic Dissection
- Periodic X-ray Analysis

### **VOLTAGE RATINGS**


Voltage Class	25 kV
Max. Rating Phase to Phase	26.3 kV
Max. Rating Phase to Ground	15.2 kV
AC 1 Minute Withstand	40 kV
DC 15 Minute Withstand	78 kV
BIL and Full Wave Crest	125 kV
Minimum Corona Voltage Level	19 kV

• 25-LBI200-122518-REV01

### **CURRENT RATINGS**

Description	Test Parameters	
Continuous	200A rms	
Switching	10 operations at 200A rms at 26.3 kV	
Fault Close	10,000A rms symmetrical at 26.3 kV for 0.17 s after 10 consecutive successful switching operations	
Short Time	<ul> <li>10,000A rms symmetrical for 0.17s</li> <li>3,500 amps rms symmetrical for 3.0s</li> </ul>	

## **DETAILED COMPOSITION OF THE CHARDON** LOADBREAK BUSHING INSERT

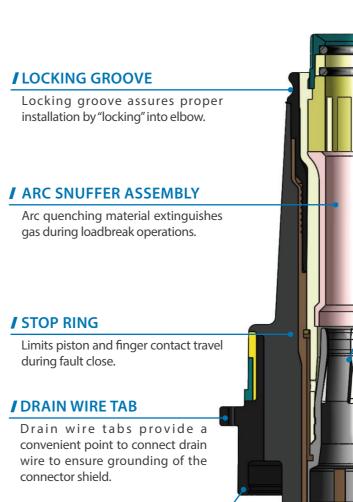


#### **I** SEMICONDUCTING SHIELD

Precision molded peroxide cured conducting shield provides ground shield continuity.

### **ORDERING INFORMATION**

25 kV, 200A Loadbreak Bushing Insert

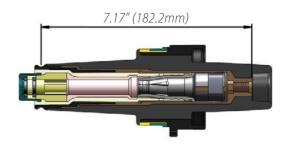

### **FINGER CONTACT**

Silver plated copper contact provides a consistent current transfer during switching and fault close operations.

#### **INSULATION LAYER**

High quality peroxide cured EPDM Insulation is mixed and formulated in-house for complete control of rubber characteristics.

### **I HEX BROACH**

5/16" hex broach permits installation with torque tool.

#### **I** THREADED CONNECTION **TO BUSHING WELL**

3/8"-16 UNC copper threads provided connection to bushing well.

### 25-LBI200



**CHARDON** TAIWAN CORPORATION

No.37 Min-Chie Road, Tung Lo Industrial Park, Miao Li, Taiwan 366 Tel : +886-37-984385 Fax : +886-37-984770

www.chardongroup.com • info@chardongroup.com