


Ficha técnica del producto

Características

QO120L125PG

Load center, QO, 1 phase, 20 spaces, 24 circuits, 125A convertible main lugs, PoN, NEMA1, gnd bar, UL

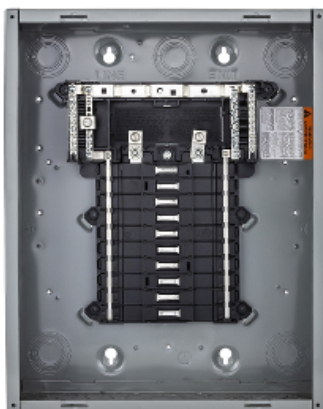

Principal

Marketing Trade Name	QO
Product	Load Center ((*))
Provided Equipment	Grounding bar

Complementario

Tightening Torque	Cover: 20 lb.in
Load Center Type	PoN Convertible Mains (lugs)
Rated Current	125 A
Number of Spaces	20
Max Short Circuit Current Rating	65 kA
Maximum Number of Single Pole Circuits	24
Maximum Number of Tandem Breakers	4
Number of Phases	1 fase
Grounding Bar	Grounding bar included (not installed) ((*))
Box Number	6
Height	455,17 mm
Width	361,95 mm
Depth	95,25 mm

Entorno

Enclosure Rating	NEMA 1 for indoor
Ambient Air Temperature for Operation	-5 °C 40 °C
Product Certifications	Registrado por UL

Sostenibilidad de la oferta

Conforme con REACH sin SVHC	Sí
Directiva RoHS UE	Conforme Declaración RoHS UE
Sin metales pesados tóxicos	Sí
Sin mercurio	Sí
Información sobre exenciones de RoHS	Sí
Normativa de RoHS China	Declaración RoHS China Declaración proactiva de RoHS China (fuera del alcance legal de RoHS China)